



HANBELL


RC2 Series

New generation of innovative design
Screw compressor dedicated to
R134a, R22, R407C, R404A, R507

High-efficiency Model RC2 Series Screw Compressor



Highlights of RC2 Series Screw Compressor

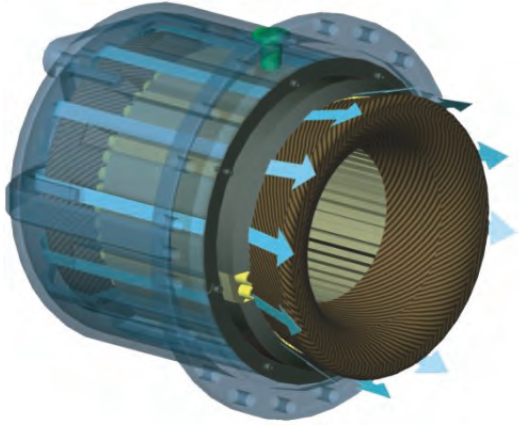


High-efficiency Motor

- Available for part winding start or star delta start
- Custom-made for specified voltage and frequency of power
- Two options A&B motor for RC2-100~RC2-930. Four options A1, A2 & B1, B2 motors for RC2-1020 ~1530.
- Optimal slot design for passage of refrigerant inside motor casing
- Refrigerant flows through outside of motor winding to provide the most efficient motor cooling
- Sliding-fit stator easier for installation and removal

Part-load Effective Economizer Operation

- Enhance cooling capacity as well as energy efficiency
- Sustain optimum medium pressure by vapor injection through specially-designed slots in slide valve and compression casing
- Effective under partial load and full load

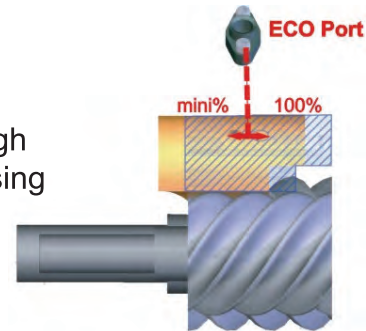

High-efficiency Screw Rotor Profile

- 5-to-6 rotor profile patented in Taiwan, US, UK, and China
- Designed according to characteristics of refrigerants
- Hyper volumetric efficiency and minimum clearance




Dual Capacity Control

- Flanged-on solenoid coil easy for installation
- 3-step / 4-step or continuous (33%~100% / 25%~100%) capacity control system
- Interchangeable by varying control logic without modification of solenoid valves

Durable Bearing Structure

- High-quality bearings (radial and axial resistance)
- Additional bearing for backward rotation
- α balance piston against axial thrust
- Heavy-duty design
- Longer bearing life compared to traditional 9-bearing design

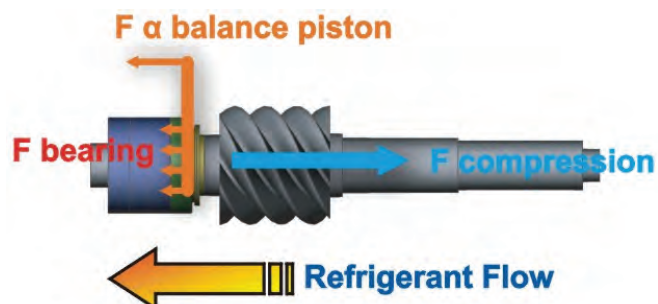

- Built-in volume ratio (VI)-2.2, 2.6, 3.0, 3.5, 4.8
- Exactly match pressure ratio without over- or under-compression
- Suitable for various applications like refrigeration, water-cooled chiller, air-cooled chiller and heat pump

Technical Data RC2-A

MODEL	COMPRESSOR					MOTOR								Lubricant charge	Oil Heater	Hydrostatic Pressure Test	WEIGHT				
	Displacement 60 / 50Hz m³/hr	Rated Speed 60 / 50Hz	VI	Cap. Control (%)		Type	Nominal Hp		Starting	Voltage (V)		Insulation	Protection								
				STEP	STEPLESS		60Hz	50Hz		60Hz	50Hz										
RC2-100A	118/98			33, 66, 100	33~100	3 Phase, 2 Pole, Squirrel Cage, Induction Motor	23	19	Y-△	208 220 230 380 440 460 480 575	Class F	PTC Protection	L	W	Kg/cm²G	kg					
RC2-140A	165/137			33, 66, 100	33~100		32	26										7			275
RC2-180A	216/180			33, 66, 100	33~100		42	35										7			280
RC2-200A	233/193			25, 50, 75, 100	25~100		45	37										8			300
RC2-230A	277/230			35, 50, 75, 100	35~100		53	44										14			420
RC2-260A	309/257			25, 50, 75, 100	25~100		59	49										14			540
RC2-300A	352/293			25, 50, 75, 100	25~100		67	56										16			545
RC2-310A	371/308			35, 50, 75, 100	35~100		71	59					PWS					16			590
RC2-320A	384/320			25, 50, 75, 100	25~100		72	60					DOL					16			575
RC2-340A	407/339			35, 50, 75, 100	35~100		77	64										16			595
RC2-370A	440/366			35, 50, 75, 100	35~100		84	70						16			600				
RC2-410A	490/407		2.2	25, 50, 75, 100	25~100		93	78						16			610				
RC2-430A	509/423		2.6	25, 50, 75, 100	25~100		93	78						16			730				
RC2-470A	567/471		3.0	25, 50, 75, 100	25~100		108	90						18	150/300	42	735				
RC2-510A	611/508		3.5	35, 50, 75, 100	35~100		117	98						20			800				
RC2-550A	660/549		4.8	25, 50, 75, 100	25~100		126	105						23			760				
RC2-580A	702/583			35, 50, 75, 100	35~100		131	109						20			820				
RC2-620A	745/619			35, 50, 75, 100	35~100		137	114						23			805				
RC2-710A	858/713			35, 50, 75, 100	35~100		158	131						28			850				
RC2-790A	952/791			30, 50, 75, 100	30~100		175	146						28			1099				
RC2-830A	993/825			30, 50, 75, 100	30~100	183	152	Y-△					28			1140					
RC2-930A	1117/929			35, 50, 75, 100	35~100	212	176	DOL					28			1150					
RC2-1020A	1223/1017			25, 50, 75, 100	25~100	227	189						40			1180					
RC2-1130A	1350/1122			25, 50, 75, 100	25~100	248	206						40			1500					
RC2-1270A	1521/1268			25, 50, 75, 100	25~100	286	238						53			1520					
RC2-1530A	1847/1539			25, 50, 75, 100	25~100	331	275						53			2100					
Unit : m³/hr 0 500 1000 1500																					

Unit : m³/hr 0 500 1000 1500

Nominal HP:

All above Nominal HP are not equal to the maximum compressor HP;
please refer to Hanbell selection software for power input in specified working condition.

Technical Data RC2-B

MODEL	COMPRESSOR				MOTOR								Lubricant charge	Oil Heater	Hydrostatic Pressure Test	WEIGHT	
	Displacement 60 / 50Hz m³/hr	Rated Speed 60 / 50Hz	VI	Cap. Control (%)		Type	Nominal Hp		Starting	Voltage (V)		Insulation					Protection
				STEP	STEPLESS		60Hz	50Hz		60Hz	50Hz						
RC2-100B	118/98			33, 66, 100	33~100	3 Phase, 2 Pole, Squirrel Cage, Induction Motor	38	31	Y-△	208 220 230 380 440 460 480 575	Class F	PTC Protection	7	150/300	42	280	
RC2-140B	165/137			33, 66, 100	33~100		50	41					7			285	
RC2-180B	216/180			33, 66, 100	33~100		66	55					7			335	
RC2-200B	233/193			25, 50, 75, 100	25~100		70	58					8			425	
RC2-230B	277/230			35, 50, 75, 100	35~100		81	67					14			555	
RC2-260B	309/257			25, 50, 75, 100	25~100		90	75					14			560	
RC2-300B	352/293			25, 50, 75, 100	25~100		107	89					16			600	
RC2-310B	371/308			35, 50, 75, 100	35~100		110	91					PWS			16	580
RC2-320B	384/320			25, 50, 75, 100	25~100		114	94					DOL			16	600
RC2-340B	407/339			35, 50, 75, 100	35~100		121	101								16	620
RC2-370B	440/366		2.2	35, 50, 75, 100	35~100		130	108								16	640
RC2-410B	490/407		2.6	25, 50, 75, 100	25~100		146	121					380 400 415			16	740
RC2-470B	567/471		3.0	25, 50, 75, 100	25~100		170	141	18	810							
RC2-510B	611/508		3.5	35, 50, 75, 100	35~100		183	152	20	780							
RC2-550B	660/549		4.8	25, 50, 75, 100	25~100		195	162	23	850							
RC2-580B	702/583			35, 50, 75, 100	35~100		210	175	20	840							
RC2-620B	745/619			35, 50, 75, 100	35~100		220	183	23	880							
RC2-710B	858/713			35, 50, 75, 100	35~100		250	208	Y-△	28						1099	
RC2-790B	952/791			30, 50, 75, 100	30~100		276	230		28						1180	
RC2-830B	993/825			30, 50, 75, 100	30~100		290	234		28						1215	
RC2-930B	1117/929			35, 50, 75, 100	35~100		334	278		DOL						28	1240
RC2-1020B	1223/1017			25, 50, 75, 100	25~100		357	297								40	1540
RC2-1130B	1350/1122			25, 50, 75, 100	25~100		393	327	40							1560	
RC2-1270B	1521/1268			25, 50, 75, 100	25~100		471	392		53						2200	
RC2-1530B	1847/1539			25, 50, 75, 100	25~100		534	443		53			2300				
Unit : m³/hr 0 500 1000 1500																	


Unit : m³/hr 0 500 1000 1500

Nominal HP:

All above Nominal HP are not equal to the maximum compressor HP;
please refer to Hanbell selection software for power input in specified working condition.


RC2-100~RC2-180 Outline

Note: Number in red indicate dimensions in which RC2-B differs from RC2-A (A / B)

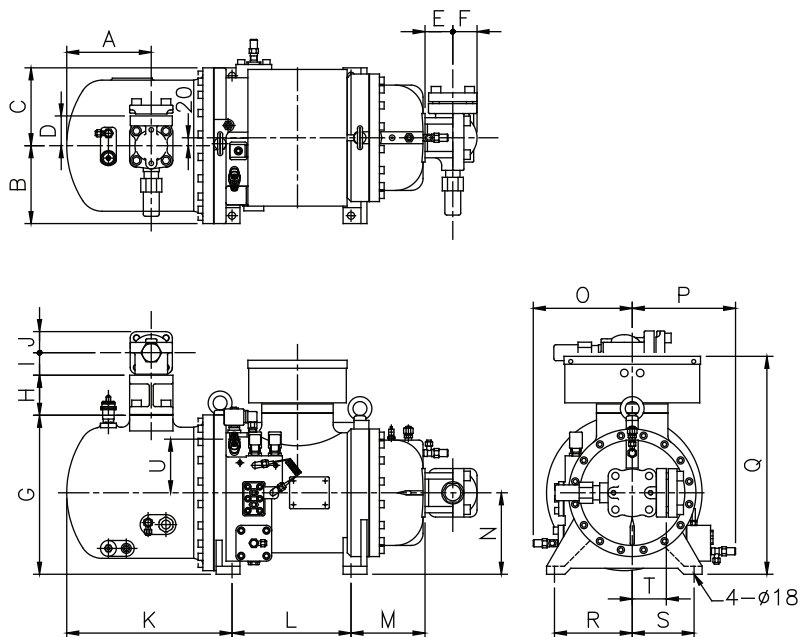


MODEL	Dimensions																				Unit: mm	
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	
RC2-100	213	196	196	75	70	61	400	101	57	53	416.5	300	186.5	205	249	260	548.5	196	156	86	135	
RC2-140	213	196	196	75	70	61	400	101	57	53	416.5	300	186.5	205	249	260	548.5	196	156	86	135	
RC2-180	283	196	196	75	81	68.5	410	101	57	53	486.5	386	196	205	239	362	548.5	196	156	95	123	

RC2-710~RC2-930 Outline

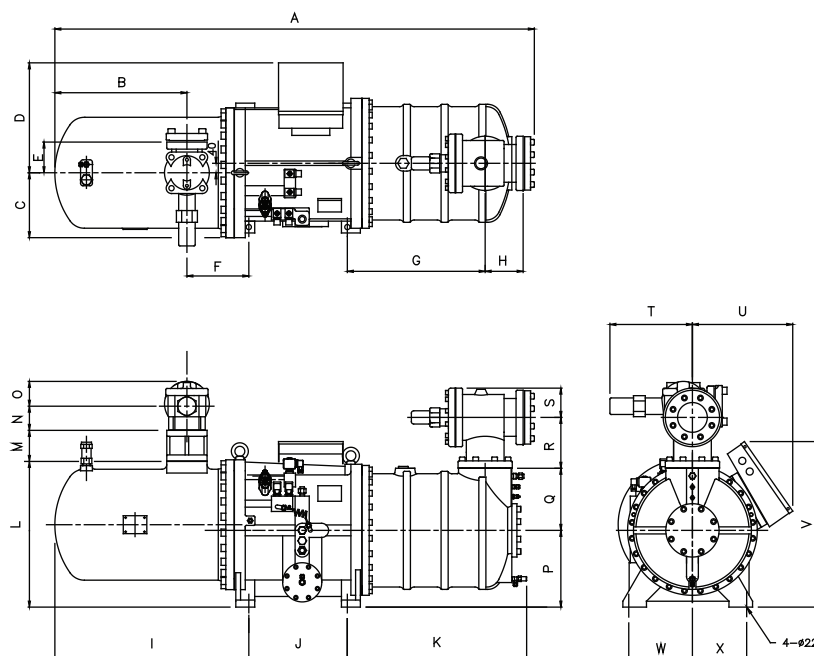


MODEL	Dimensions																					Unit: mm			
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
RC2-710	1898.5 /1968.5	560	275	466	130	262.5	514.5 /584.5	161	822.5	353	690 /760	617	131.5	103	105	325	263	215.5	124	350	426	701	270	230	269
RC2-790	1963.5 /2033.5	560	275	466	130	262.5	514.5 /584.5	161	822.5	418	690 /760	617	131.5	103	105	325	263	215.5	124	350	426	701	270	230	230
RC2-830	1963.5 /2033.5	560	275	466	130	262.5	514.5 /584.5	161	822.5	418	690 /760	617	131.5	103	105	325	263	215.5	124	350	426	701	270	230	230
RC2-930	2033.5 /2087.5	560	275	466	130	262.5	584.5 /638.5	161	822.5	418	760 /814	617	131.5	103	105	325	263	215.5	124	350	426	701	270	230	230

RC2-200~RC2-580 Outline

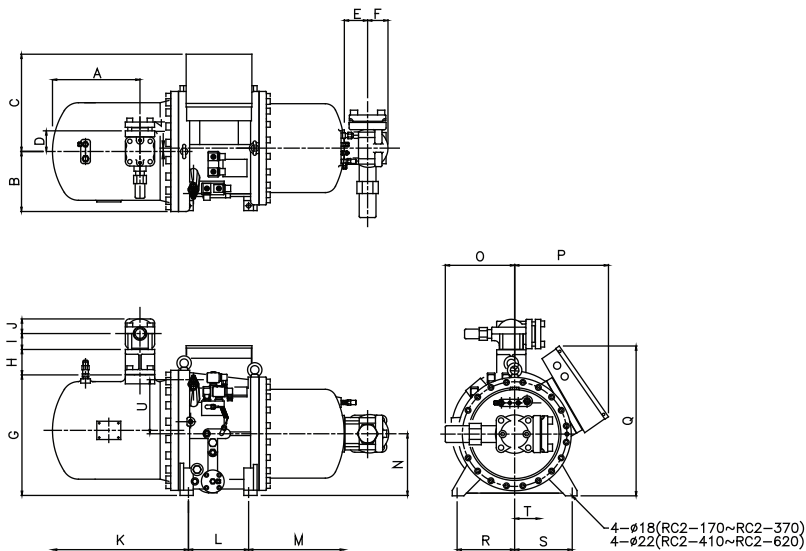


RC2-550~RC2-620 Outline

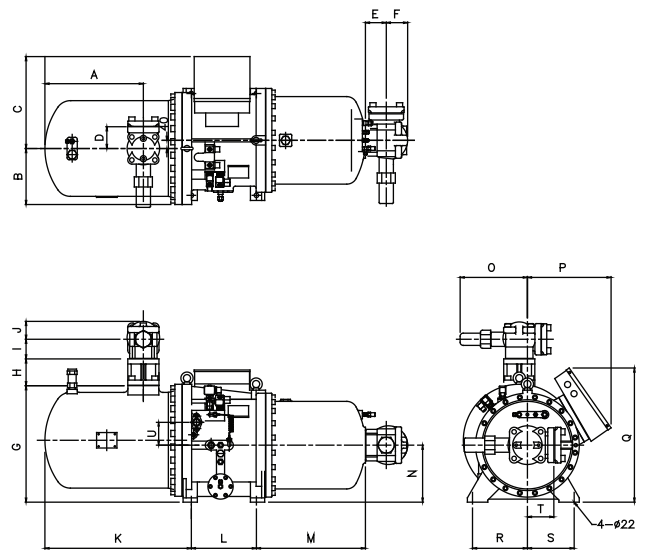

MODEL	Dimensions																			Unit: mm	
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
RC2-200	345	229	378	75	82	69	447	101	57	53	536	228	341 /386	225	245	362	592	225	225	95	196
RC2-230	365	250	405	86	97	85	502	106	67	61	567	251	399	257	289	391	624	240	240	107	225
RC2-260	365	250	405	86	97	85	502	106	67	61	567	251	399	257	289	391	624	240	240	107	225
RC2-300	408	250	405	86	97	85	502	106	67	61	610	285	399 /444	257	289	391	624	240	240	107	229
RC2-310	408	250	405	86	97	85	502	106	67	61	610	251	444	257	289	391	624	240	240	107	225
RC2-320	408	250	405	86	97	85	502	106	67	61	610	285	399 /444	257	289	391	624	240	240	107	229
RC2-340	408	250	405	95	103	105	502	121	81	69	610	285	447 /492	257	310	391	624	240	240	130	228
RC2-370	408	250	405	95	103	105	502	121	81	69	610	285	447 /492	257	310	391	624	240	240	130	228
RC2-410	392	275	453	95	103	105	553	120	81	69	613	288	433	275	315	413	655	270	230	130	255
RC2-430	392	275	453	95	103	105	553	120	81	69	613	288	433	275	315	413	655	270	230	130	255
RC2-470	440	275	453	95	103	105	553	120	81	69	661	320	433 /478	275	315	413	655	270	230	130	255
RC2-510	465	275	453	107	103	105	560	131.5	96.5	88	696	288	484	275	331	413	655	270	230	130	254
RC2-550	484	275	451.5	107	103	105	572	131.5	96.5	88	720	320	477 /536	280	331	411.5	659	270	230	130	112
RC2-580	465	275	453	107	103	105	560	131.5	96.5	88	696	320	484	275	331	413	655	270	230	130	255
RC2-620	484	275	451.5	107	220	124	572	131.5	96.5	88	720	320	525	280	331	411.5	659	270	230	161	112





RC2-1020~RC2-1530 Outline

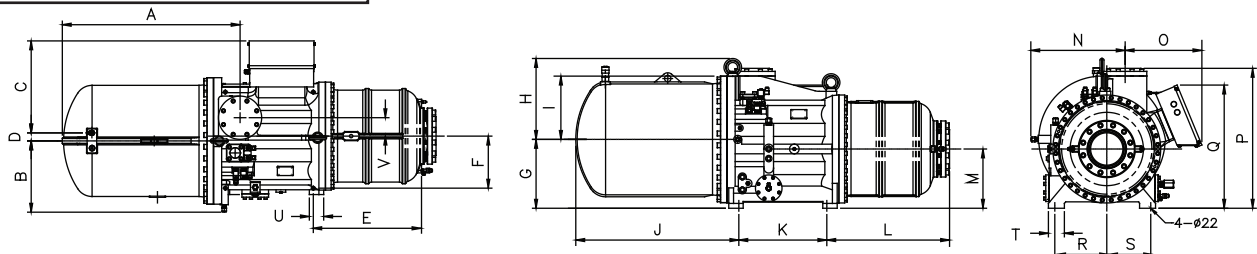

MODEL	Dimensions											Unit: mm	
	A	B	C	D	E	F	G	H	I	J	K		
RC2-1020/1130	1120	350	480	45	656	325	410	365	350	1000	470		
RC2-1270/1530	1112	445	575	50	677	325	430	505	395	1020	550		

MODEL	Dimensions											Unit: mm	
	L	M	N	O	P	Q	R	S	T	U	V		
RC2-1020/1130	723	370	451	499	715	728	325	275	100	100	60		
RC2-1270/1530	768	370	590	480	825	770	325	275	100	90	115		

RC2-100~RC2-930 Application Limits

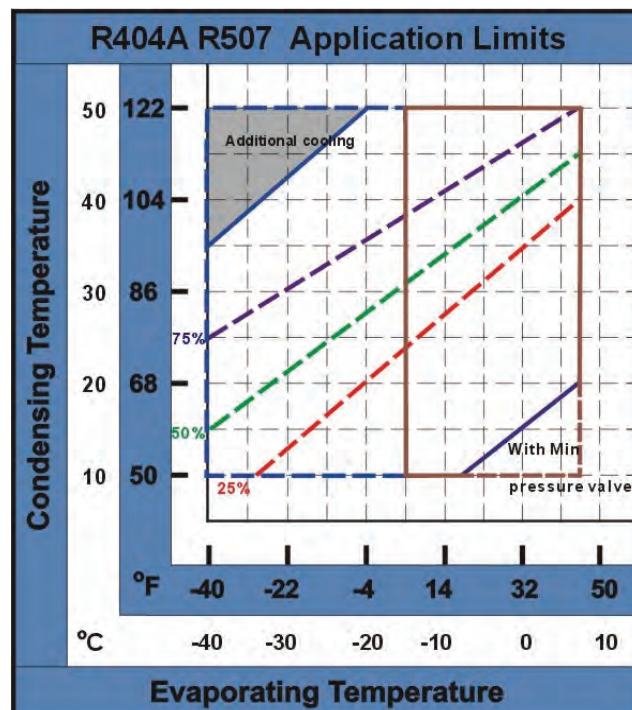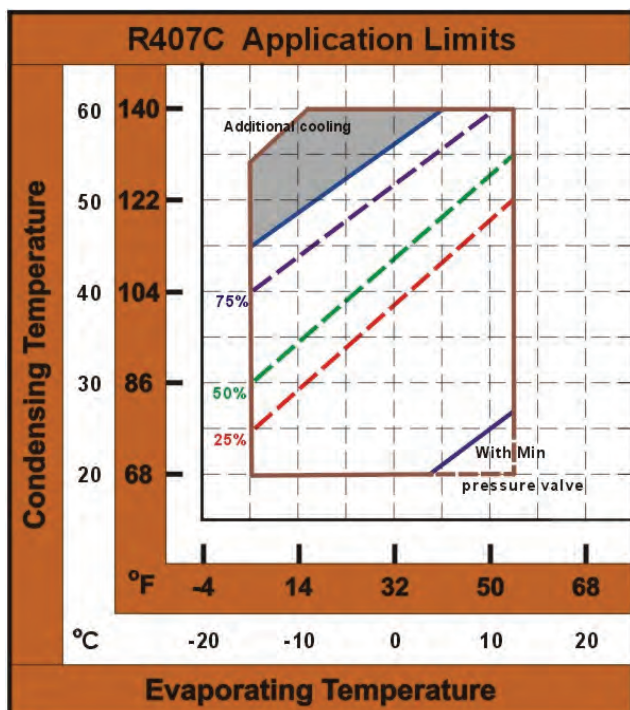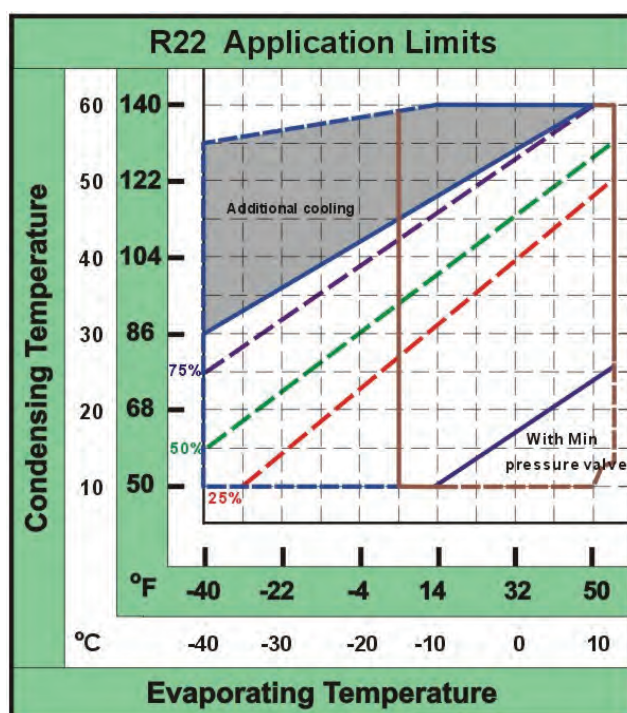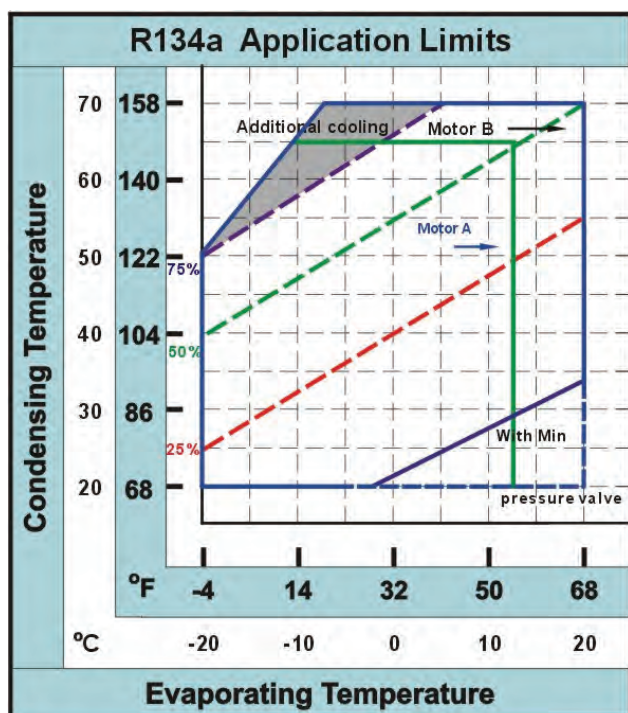

Please consult Hanbell sales representatives for the application limits of models RC2-1020~RC2-1530



SHANGHAI HANBELL PRECISE MACHINERY CO., LTD

No.8289, Tingfeng RD, Fengjing Area, JinShan District, Shanghai
 TEL:+86-21-57350280 FAX:+86-21-57352004
<http://www.shahanbell.com.cn>
 E-mail:sales@shahanbell.com

HERMES VIET NAM MACHINERY COMPANY LIMITED
 Block 28-30-32, 11 Street, Tan Duc Industrial Park, Commune, Duc Hoa District, Long An Province, Viet Nam.
 TEL: +84-72-3769688 FAX: +84-72-3769690

HANBELL PRECISE MACHINERY CO., LTD.

NO.5 Kongsan Road, Kuan-Yin Industrial Park, Kuan-Yin Shiang, Tao-Yuan Hsien, Taiwan, R.O.C.
 TEL:+886-3-4836215
 FAX:+886-3-4836223
<http://www.hanbell.com>
 E-mail:sales@hanbell.com

HANBELL EUROPE

Via dei Campazzi 25 / 27, 21040 Gerenzano (VA), Italia
 TEL:+39-02-962-80188
 FAX:+39-02-962-48011
<http://www.comer-srl.com>
 E-mail:vincentyen@hanbell.com
 E-mail:michellesteng@hanbell.com



HBCE-RC2-12-C(2000)